



FLUSSONIC BULLET 2.0MP IP camera




IP camera for using with Flussonic Watcher app with the features of control and view video on your smartphone

KEYFEATURES

- Resolution 1920x1080@25fps
- 18x IR-LED, Up to 25 Meters
- Low illumination camera
- ONVIF
- Embedded Flussonic Agent

DIMENSIONS (MM)

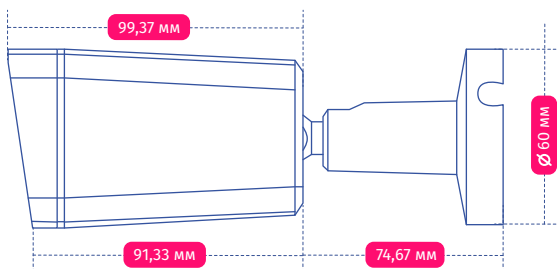

SPECIFICATIONS

Camera

Sensor	1/3" black light CMOS sensor
Min. illumination	Color: 0.0001 Lux @(F1.2,AGC ON); 0 Lux with IR B/W: 0.0001 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter time	1/50s to 1/10,000 s
Lens	HD lens 2.8 mm @F2.0
Day&night	IR cut filter with auto switch

Image

Max. image resolution	1920*1080
Frame rate	1080P@25fps
Setting	Saturation, brightness and contrast

Compression

Video compression	H.265AI/H.265+/H.264
Bitrate	0.1Mbps ~8Mbps
Audio compression	G.711a

Network

Alarm	Motion detection, video loss, video block, etc.
Protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, PPPoE, SMTP, NTP

Interface

Ethernet	1 x 10/100Mbps Ethernet port
----------	------------------------------

General

Temperature	-10℃~+60℃
Humidity	10%-90%
Power supply	DC12V±10%/POE
IR range	24 led lamps "IR2":20-30 meters
Consumption	MAX 5W
Material	Metal
Ingress Protection	IP66
Weight	300g
Dimension	166mm x 60mm x 60mm

flussonic.com, support@flussonic.com
+1 (778) 716-2080

©2021 Flussonic. All right reserved. Disclaimer: The information provided in this document represents the current design and specifications which are subject to change without notice. Under no circumstances, this document shall be reproduced, changed partially or wholly or distributed without the specific prior written authorization of Flussonic.