



FLUSSONIC HOME 2.0MP IP camera




IP camera for using with Flussonic Watcher app with the features of control and view video on your smartphone

KEYFEATURES

- Resolution 1920×1080
- Supports smart phone remote viewing
- Wi-Fi IEEE802.11b/g/n
- PAN and TILT
- With Customized Voice function
- Embedded Flussonic IRIS

DIMENSIONS (MM)

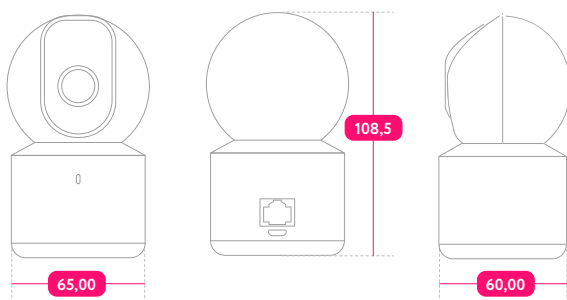

SPECIFICATIONS

Video

Image Sensor	1/2.9" Progressive Scan CMOS
Max Resolution	Up to 1920x1080
Effective Pixels	2.0 MP
Compression Standard	H.264
Framerate (fps)	Up to 25fps
BitRate	40Kbps~6Mbps
Illumination	5Lux (IR ON)

Lens

Interface Type	M12
Lens	Fixed 4mm, F2.0
Viewing Angle	H:88°, V: 46°, D: 102°

Function

Exposure Mode	Auto
Automatic Gain Control	Auto
White Balance	Auto
Motion Detection	Support
Day-Night Vision	IR-CUT, Supports color/black switch
Remote control	Enable motion detection, Enabled PUSH notifications, managing network and picture settings
Detection Alarm	PUSH-Notifications to mobile app, web interface, message
Storage	Up to 128GB
Pan/Tilt	Pan: 345° Tilt: 117°

Interfaces

Audio Input	1 Channel Internal MIC
Audio Output	1 Channel Internal Speaker
TF Card	Support
Reset	Support

Network

Ethernet	10M/100M Ethernet, RJ45 Port
Wi-Fi	Wi-Fi (IEEE802.11b/g/n)
Stream	Dual stream
Protocols	TCP/IP, ICMP, UDP, SMTP, DHCP

General

IR Light	8 pcs
IR Distance	10m
Working Temperature	-10°C~55°C
Humidity	RH 10%~90%
Power Supply	DC5V/1.5A
Consumption	Day<3W, Night<6W
Color/Material	White/ABS+PC
Dimension (WxHxD)	65 x 60 x 108.5(mm)

flussonic.com, support@flussonic.com
+1 (778) 716-2080

©2020 Flussonic. All right reserved. Disclaimer: The information provided in this document represents the current design and specifications which are subject to change without notice. Under no circumstances, this document shall be reproduced, changed partially or wholly or distributed without the specific prior written authorization of Flussonic.